


Polycoat Green



Food contact
certified

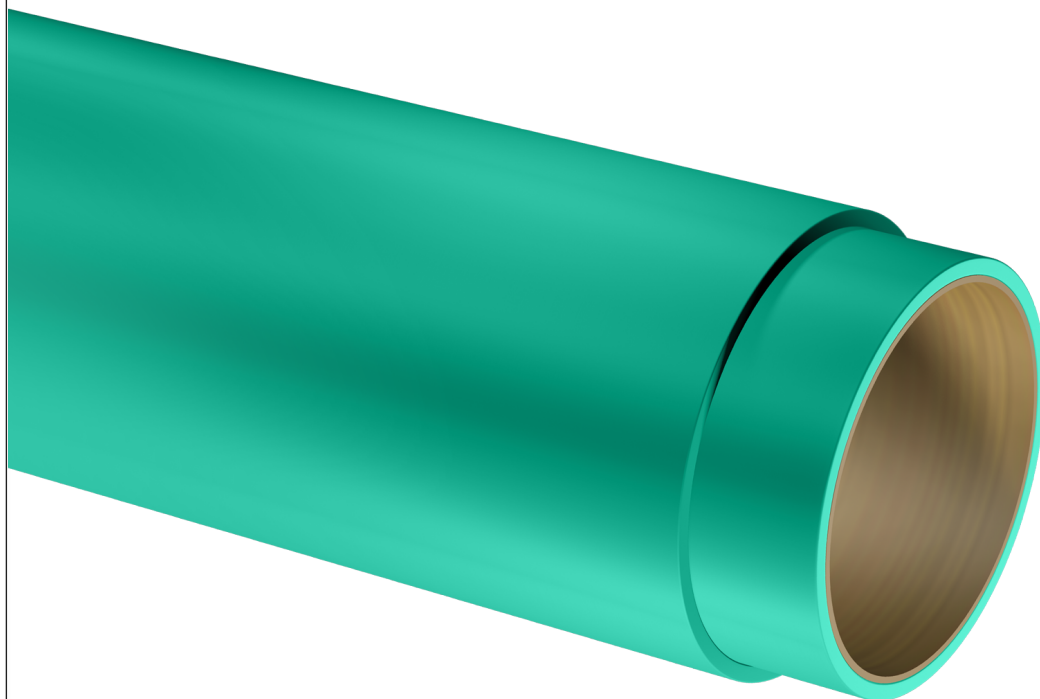

max load 25
[kg/cm]



max temp 140
°C



Speedwell
System

Elastomer to coat rollers and Speedwell sleeves specifically for spreading solvent-less, two-component glues. The base polymer is blended with non-stick additives that avoid the closure of the cells on the outer surface during work and maintain the ideal surface tension value for guaranteeing a uniform distribution and thickness of the adhesive layer with a considerable saving on the total amount of used glue when compared to traditional rubbers. Moreover the surface tension and the wettability of the rubber is also connected to different other production parameters like external roughness, uniformity, purity and correct formulation of the compound. In order to maintain the technical characteristics of Polycoat, Rossini suggests a yearly grinding of the external surface and a proper cleaning procedure with the use of specific softener in addition to the solvent – 100% etyl acetate.

All the special Rossini compounds are available both in Speedwell Sleeve configuration

and Rubber roller.

structure

Roller with steel core and/or Speedwell sleeve with a specially formulated, fibreglass conical base. Polycoat Green coating ground to measurement.

specifications

Colour	Green
Rubber-coated roller - Min/Max diameter	35 - 550 [mm] // 1.373" - 21.569"
Rubber-coated roller - Min/Max length including pins	150 - 5.000 [mm] // 5.882" - 196.078"
Speedwell Sleeve - Min/Max diameter	80 - 450 [mm] // 3.137" - 17.647"
Speedwell Sleeve - Min/Max length - Tolerance UNI:ISO 2768T1m	350 - 3500 [mm] // 13.725" - 137.255"
Coating thickness	5 - 35 [mm] // 0.197" - 1.373"
Min coating thickness to guarantee after grinding	5 [mm] // 0.197" - Grinding value at a minimum must be supplied by the client based on the possible adjustment of the printing press
Surface hardness - Tolerance +/-3 Shore A	80 Shore A
Maximum resistance to pressure	25 [Kg/cm]
Maximum temperature resistance	140 °C - 284 °F
Compressed air for sleeve assembly	12 - 20 [bar] // 174 - 290 PSI Minimum capacity: 700 [l/min] with air input having a free passage with D => 8[mm]
Working tolerance	External finishing with precision grinding (Ra=0.8) with T.I.R. < 0.03 mm] when measured on a mandrel with T.I.R. <= 0.005 [mm]
Resistance to chemicals	Alcohol -Ethyl acetate -Water - Isocyanate - Ozone

Rossini S.p.A. provides no warranties that the contents of this document demonstrate, in particular, the fitness of the products it contains for any specific purpose; we therefore ask customers to verify in advance that the product's characteristics are suitable for its intended use. Rossini S.p.A. reserves the right to update this publication and periodically modify its contents, including technical/commercial information, without further notice of the amendments or changes made. This document and any logos, trademarks and specifications etc. it contains are protected by copyright laws with all rights reserved.



Rossini World
Italy • France • Spain
Germany • United Kingdom
Romania • Brasil • China
United States • India

Rossini S.p.A. HeadQuarters
Via de Gasperi, 5
20027 Rescaldina - Milano - Italy
Tel. +39 0331 47 27 11 - Fax +39 0331 57 97 46
comm.dept@rossini-spa.it

WWW.ROSSINI-SPA.IT